


ProTac Stress Absorbing Membrane

Self Adhering Membrane Strip / Culvert Bandage

Self adhering/Stress absorbing/Strain Alleviating membrane strip

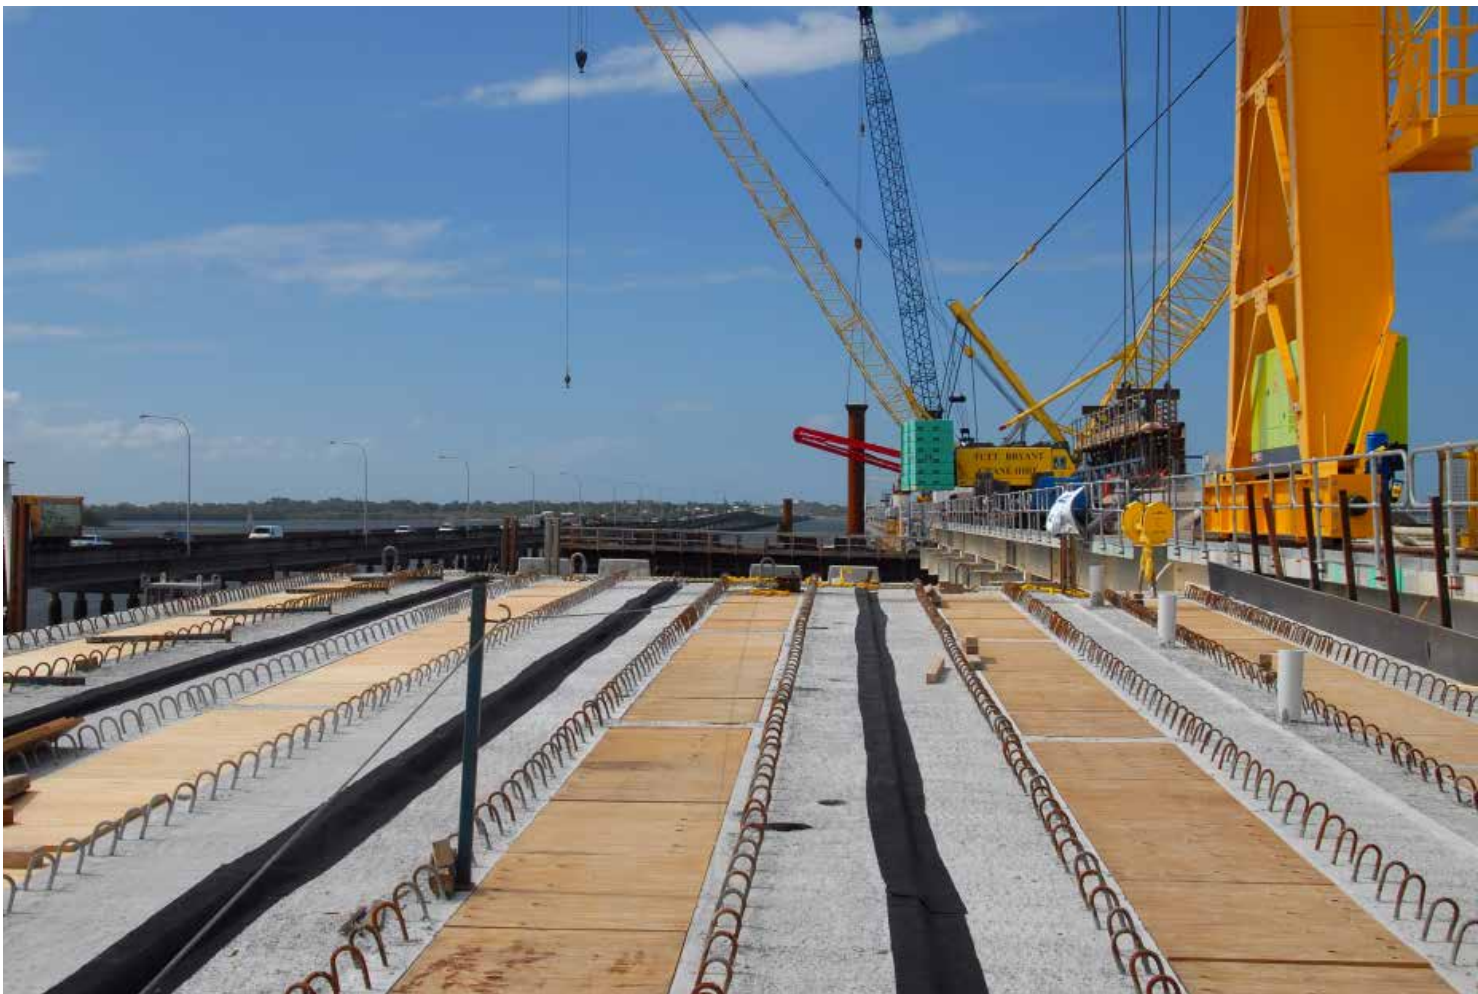

Product Information

ProTac is a self adhering waterproofing membrane used in conjunction with resurfacing and overlaying operations and in pipe/culvert bandage operations to seal joints. It is comprised of a stress absorbing geotextile fabric that is combined with a rubberised bitumen to produce a composite membrane that bonds tenaciously to clean, dry surfaces.

ProTac is a versatile strain alleviating fabric strip meeting client expectations and industry specifications providing the following benefits and applications for use.

Applications

Applications include crack sealing of many surfaces prior to surface overlaying or backfilling in applications such as:

- Road surfaces
- Lane widening joints
- Other paved surfaces such as runways and carparks
- Bridge decks and pipe / culvert joint sealing
- Sealing of bridge girder joints prior to surfacing

ProTac Stress Absorbing Membrane

Benefits

- Quick and easy to install, self adhering
- Reduces reflective cracking
- Available in different roll widths
- Robust product with a high elongation to allow flexibility
- Stress relief and waterproofing in concrete and asphalt pavements

Features

- To seal joints
- Made of stress absorbing geotextile fabric

Product Data Sheet

Property	Test Method	Units	Typical Value
Grab Tensile Strength	AS3706.2	N	900
Thickness	AS3706.1	mm	2.0
Mass Per Unit Area	AS3706.1	kg/m ²	2.2
Dimensions		m	0.3 x 30.5

Other widths of ProTac available upon request

About Us

Leaders in Geosynthetics

Global Synthetics is a 100% Australian-owned company, proud to offer a complete range of high-quality geosynthetic products backed by over 200 years of combined staff experience in the industry.

We have supplied products to some of the largest recent infrastructure works in Australia. Global Synthetics provides major benefits to any geotechnical engineering project with the right products and our technical expertise.

Global Synthetics products are used in the following applications:

- Pavement Stabilisation
- Ground Improvement
- Soil Reinforcement and Retaining Structures
- Water Management
- Drainage Systems & Hydraulic Works
- Landfills
- Coastal Erosion Structures

Get in Touch

AUSTRALIA

Website

globalsynthetics.com.au

Email

info@globalsynthetics.com.au

New South Wales

(02) 9725 4321

North Qld

(04) 5921 1692

Victoria/Tasmania

(03) 9791 1772

Queensland

(07) 3865 7000

South Australia

(08) 8384 8894

Western Australia

(08) 9459 4300

NEW ZEALAND

Website

globalsynthetics.co.nz

Email

info@globalsynthetics.co.nz

Auckland

0800 510 120

Christchurch

0800 510 120



All information provided in this publication is correct to the best knowledge of the company and is given out in good faith. The information presented herein is intended only as a general guide to the use of such products and no liability is accepted by Global Synthetics Pty Ltd for any loss or damage however arising, which results either directly or indirectly from the use of such information. Global Synthetics Pty Ltd have a policy of continuous development so information and product specifications may change without notice.



Global Synthetics
LEADERS IN GEOSYNTHETICS